

Series 30

Function

Series 30 valves offer all the quality and reliability of Made in Italy products. The entire range is finished with chrome-plating, which guarantees a thicker coverage and, as a consequence, a better resistance to ageing and corrosion, not to mention a superior aesthetic appearance. Thermostatic valves allow to preset the flow rate.



Technical data

Max. working pressure:	10 bar
Max. differential pressure:	1 bar
Max. working temperature:	120 °C
Working fluids:	water in compliance with UNI 8065:2019

Materials

Body:	CW 617 N – DW UNI-EN 12165:2016
Obturator:	CW 614 N – DW UNI-EN 12164:2016
Gaskets:	Peroxide cured EPDM
Knob:	Chrome-plated/ RAL9016 white ABS


Surface treatment

Chrome-plating

Dimensional Drawings

RS 159/A

Manual angle valve.
Copper and plastic pipe G3/4 Eurokonus




Code	Size	A	B	C	D	E
20842703	DN15 1/2	67	47	20	27	-
20842703CB	DN15 1/2	67	47	20	27	-

Code	Size	F	G	H	L	M
20842703	DN15 1/2	G3/4 Ek	-	G1/2	39	-
20842703CB	DN15 1/2	G3/4 Ek	-	G1/2	39	-

RS 2509/A

Single adjustment straight radiator valve with O-ring.
Copper and plastic pipe G3/4 Eurokonus




Code	Size	A	B	C	D	E
20722703	DN15 1/2	77	49	22	36	-
20722703CB	DN15 1/2	77	49	22	36	-

Code	Size	F	G	H	L	M
20722703	DN15 1/2	G3/4 Ek	-	G1/2	41	-
20722703CB	DN15 1/2	G3/4 Ek	-	G1/2	41	-

RS 146

Manual angle valve.
Connection for iron pipe.




Code	Size	A	B	C	D	E
20022103	DN15 1/2	67	47	20	27	-
20022103CB	DN15 1/2	67	47	20	27	-

Code	Size	F	G	H	L	M
20022103	DN15 1/2	G1/2	-	G1/2	39	-
20022103CB	DN15 1/2	G1/2	-	G1/2	39	-

DS 89/A


Angle regulating lockshield.
Copper and plastic pipe G3/4 Eurokonus



Code	Size	A	B	C	D	E
20162703	DN15 1/2	55	49	27	27	-
20162703CB	DN15 1/2	55	49	27	27	-

Code	Size	F	G	H	L	M
20162703	DN15 1/2	G3/4 Ek	-	G1/2	41	-
20162703CB	DN15 1/2	G3/4 Ek	-	G1/2	41	-


Hydraulic Characteristics

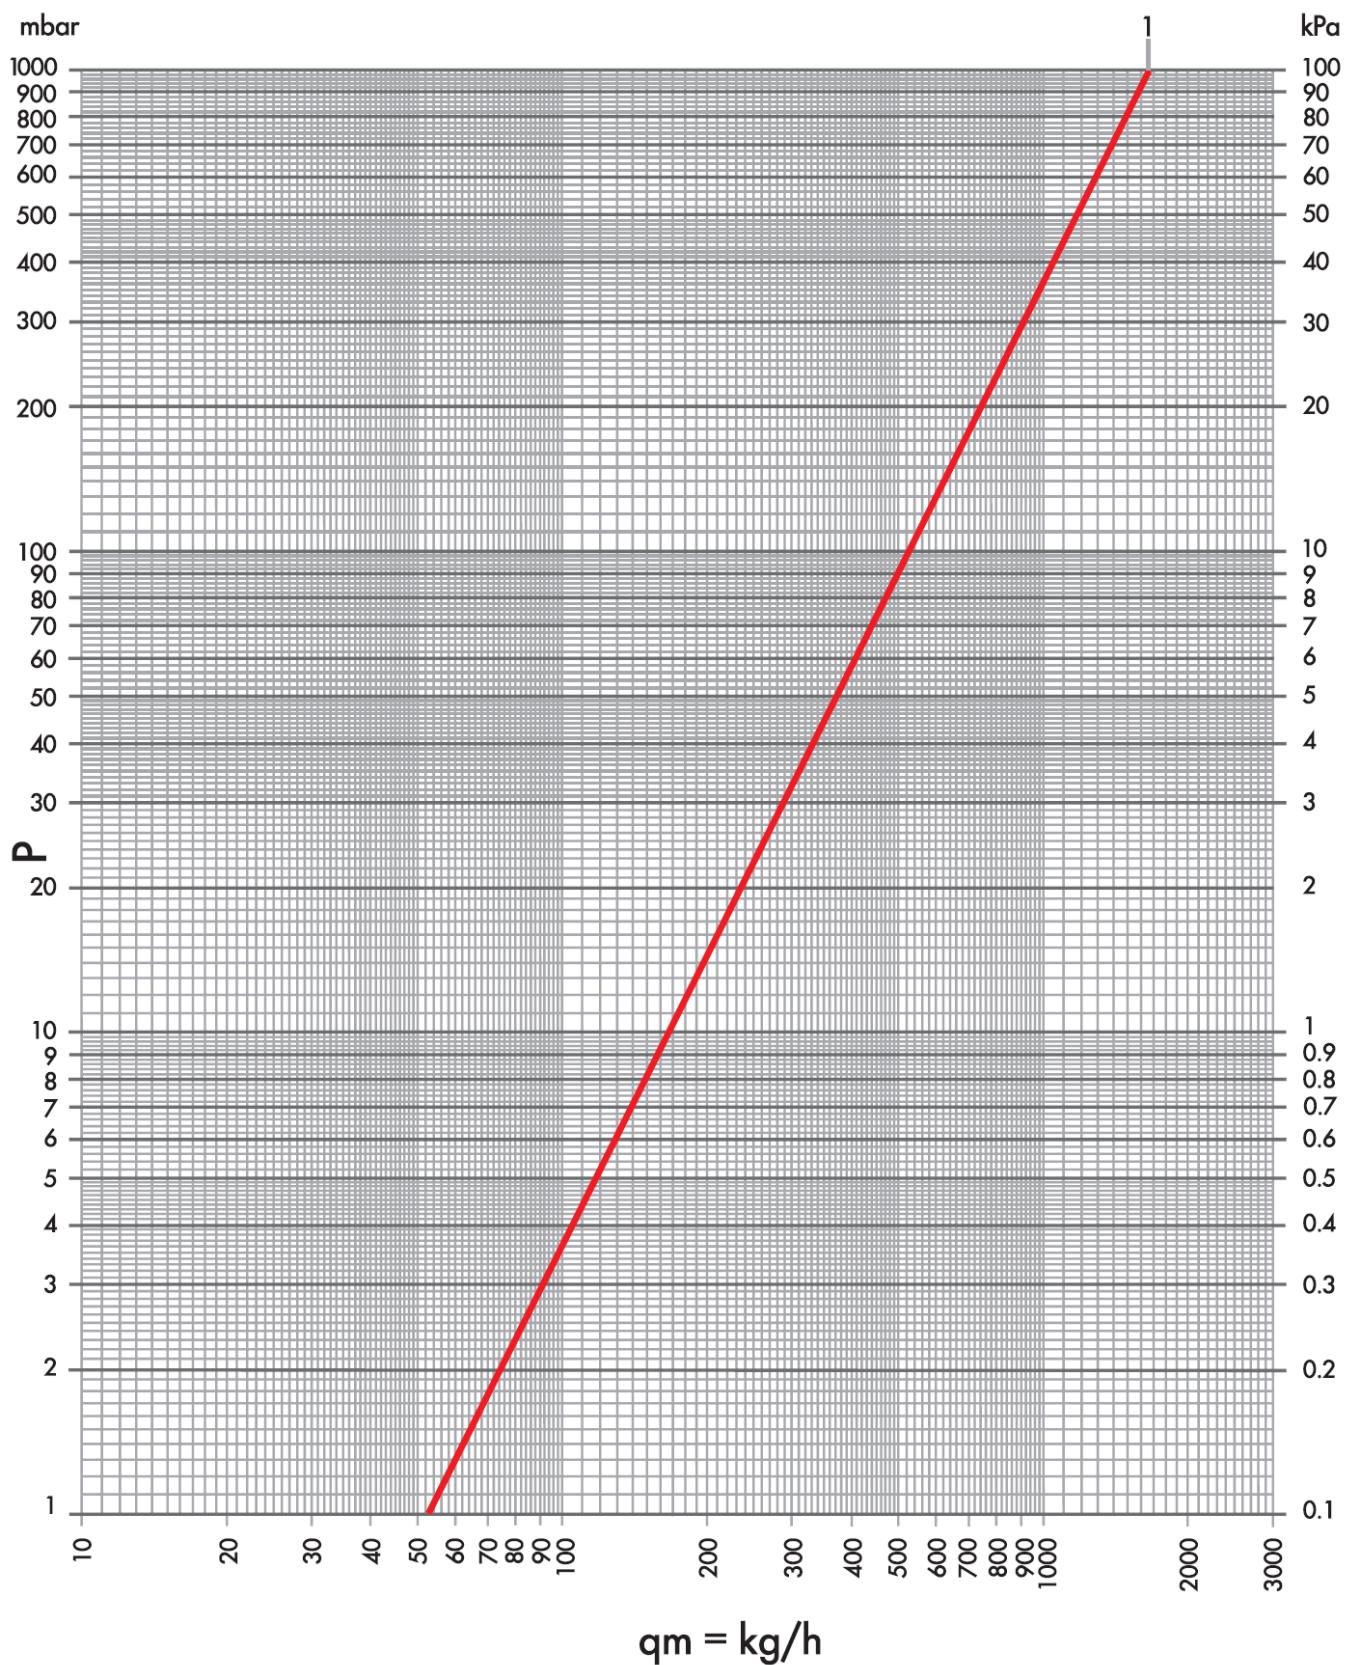

Curve Kv Items

1 1.65 RS 159/A 1/2; RS 146 1/2


Hydraulic Characteristics

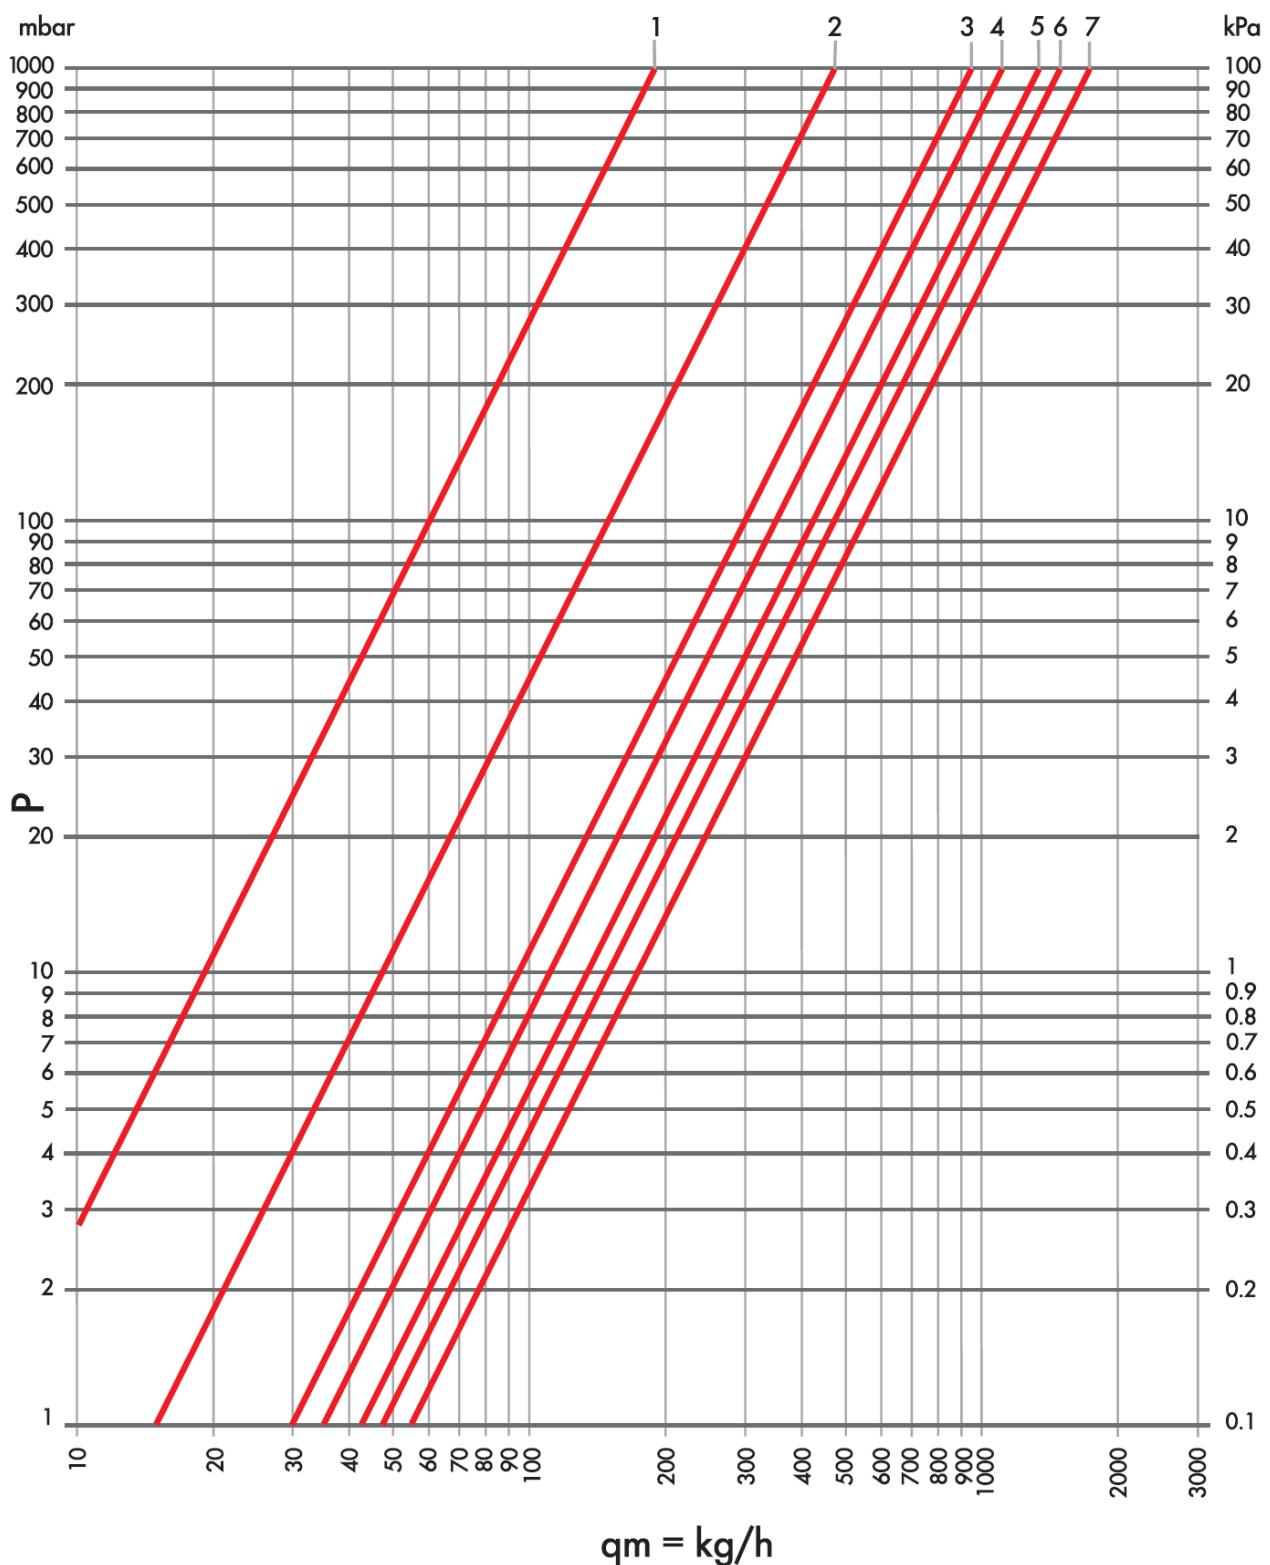

Position	Turns	K_v
1	1	0.19
2	1+1/2	0.48
3	2	0.71
4	2+1/2	0.92
5	3	1.06
6	3+1/2	1.18
7	All open	1.29


Ds 89/A 1/2

Hydraulic Characteristics

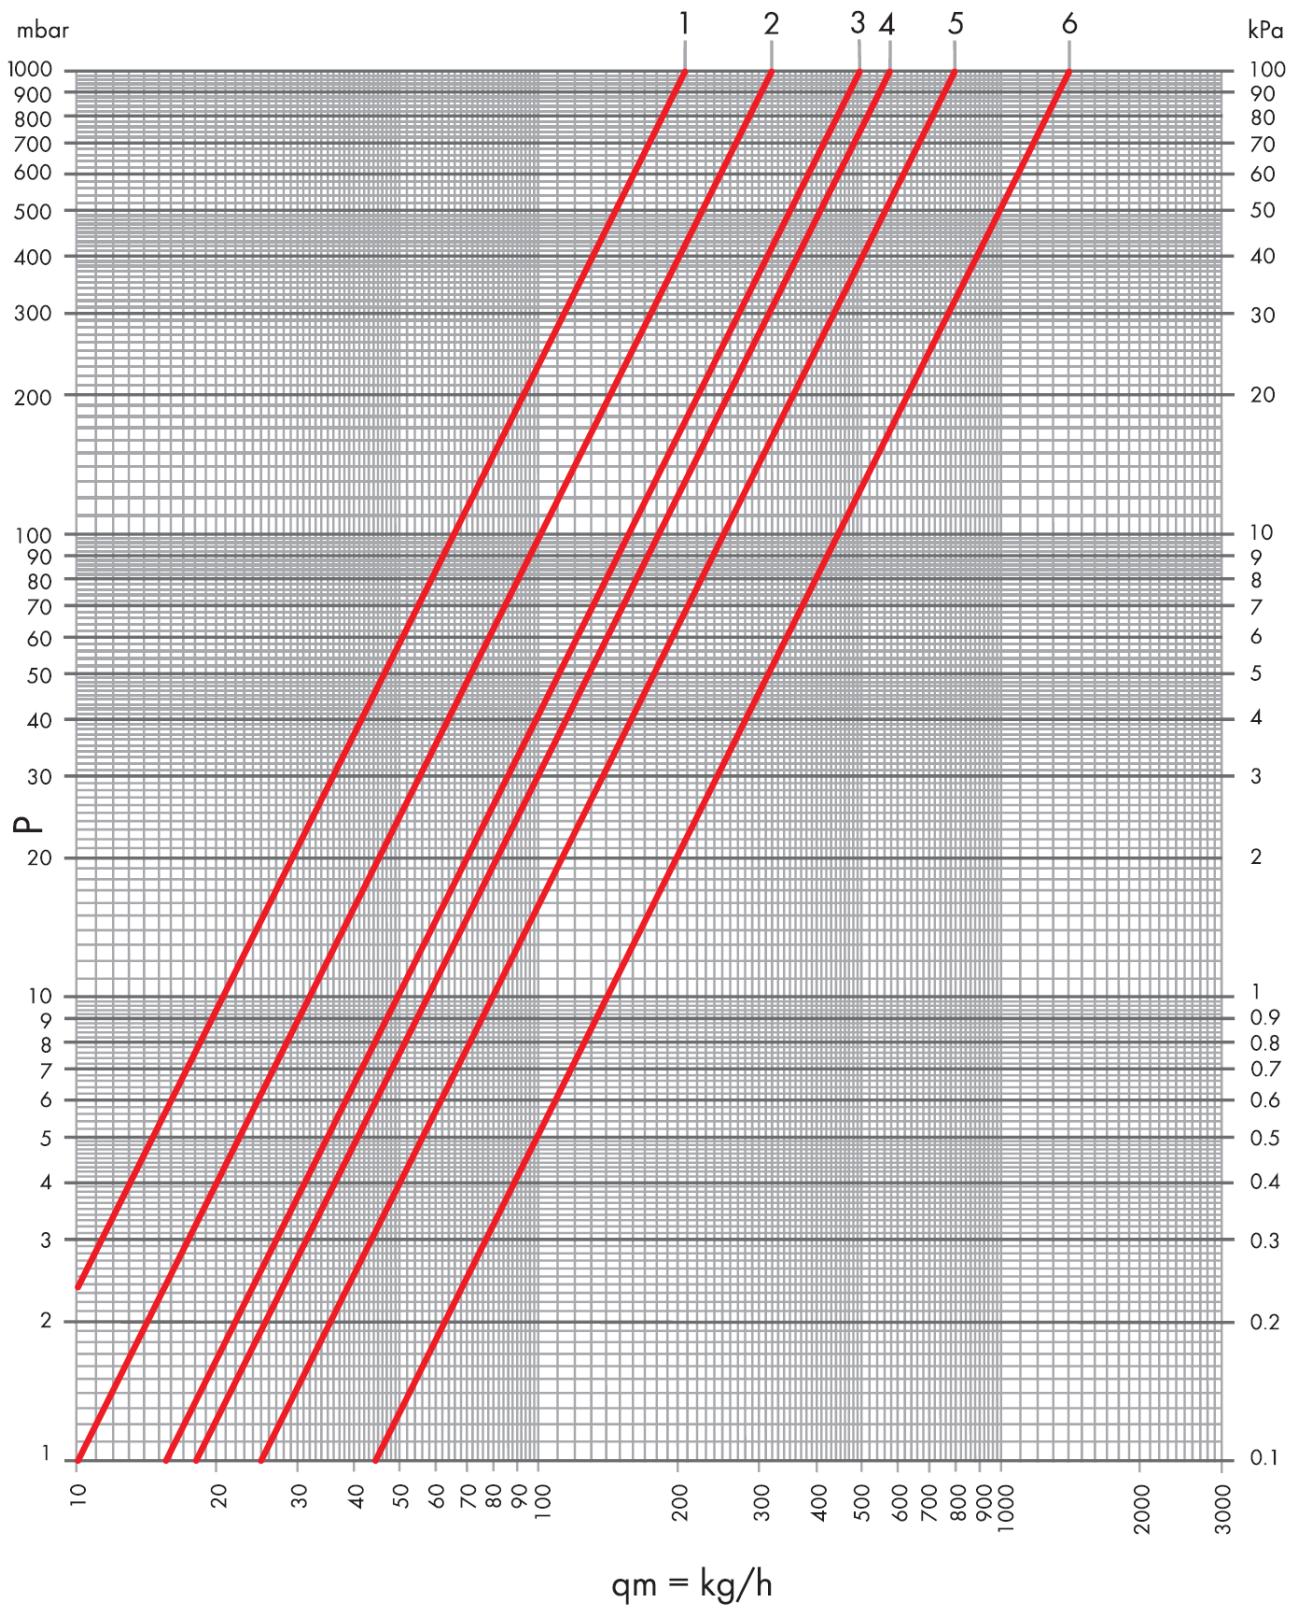

Curve	K _v	K _v Δt 1°C	K _v Δt 2°C	Items
1	0.10	0.07	0.07	
2	0.32	0.20	0.25	
3	0.49	0.24	0.36	
4	0.57	0.24	0.37	RS 2509/A 1/2
5	0.79	0.24	0.40	
6	1.39	0.32	0.55	

Working Instructions





- **PROTECTION CAP:** Protects the thread during installation and allows for full closing of the valve. It enables to calibrate the nominal lift as follows:
 - Turn the cap until the valve is completely closed without forcing;
 - Draw a reference line on the valve body corresponding with one of the cap's notches;
 - Unplug the cap for two notches.



- **STEM SEALING:** The tightening device can be easily replaced without draining the system:
 - Unscrew the hexagonal collar by means of a 13 mm wrench;




- Remove the O-ring "A", clean the stainless steel stem and insert a new O-ring "A";
 - Screw the collar tightly back.



- **FLOW RATE ADJUSTMENT:** To set the maximum flow rate:
 - Align the reference mark "B" on the stainless steel stem with one of the positions printed on the valve body.

- **WARNING:** Once the system has been leak tested, please relieve the pressure. A differential pressure over 1 bar between the inlet and the outlet of the valve may cause the sealing O-ring to be expelled.



Item Specifications

RS 159/A

Manual angle radiator valve with ABS knob. 3/4 EK male connection for copper, plastic and multilayer pipe. 1/2 male radiator connection prefitted with peroxide cured EPDM O-ring, cylindrical thread and O-ring. Valve body in chrome-plated CW617N brass. Double peroxide cured EPDM O-ring. Max. working temp. 120 °C, max. working pressure 10 bar, differential pressure 1 bar.

RS 146

Manual angle radiator valve with ABS knob. ISO 228/1 1/2" F connection for iron pipe. 1/2 male radiator connection prefitted with peroxide cured EPDM O-ring, cylindrical thread and O-ring. Valve body in chrome-plated CW617N brass. Double peroxide cured EPDM O-ring. Max. working temp. 120 °C, max. working pressure 10 bar, differential pressure 1 bar.

DS 89/A

Regulating angle lockshield valve with ABS sealing plug. 3/4 EK male connection for copper, plastic and multilayer pipe. 1/2 male radiator connection prefitted with peroxide cured EPDM O-ring, cylindrical thread and O-ring. Valve body in chrome-plated CW617N brass. Max. working temp. 120 °C, max. working pressure 10 bar, differential pressure 1 bar.

RS 2509/A

Angle radiator valve, thermostatically or electronically controlled, with manual ABS safety control knob. 3/4 EK male connection for copper, plastic and multilayer pipe. 1/2 male radiator connection prefitted with peroxide cured EPDM O-ring, cylindrical thread and O-ring. Valve body in chrome-plated CW617N brass. Double peroxide cured EPDM O-ring on the AISI 316 stainless steel stem. Max. working temp. 120 °C, max. working pressure 10 bar, differential pressure 1 bar.



Luxor S.p.A.

Sede amministrativa, stabilimento e uffici commerciali:

Administrative office, factory and commercial office:

Tel.: 030-9961161 – Fax: 030-9961165

info@luxor.it – www.luxor.it

*Luxor si riserva il diritto di apportare miglioramenti e modifiche ai prodotti descritti ed ai relativi dati tecnici in qualsiasi momento e senza preavviso -
Luxor reserves the right to ameliorate and modify the above products and their technical data at any time and without notice*

via Madonnina, 94 – 25018 Montichiari - (BS) Italy